


Weather Resistant Nylon Cable Ties

WIRE MANAGEMENT

Dome-Top® Barb Ty Cable Ties

Cable Tie Tensioning Tools available
online at store.polarwire.com

Weather Resistant Ties offer greater resistance to damage caused by ultraviolet light and are suitable for indoor and outdoor use. High strength, low thread force. Use to bundle and secure wire and cable, as well as a wide array of other fastening and securing applications. Engineered and manufactured for maximum performance and quality. Rated for use at -60°C to 115°C (-76°F to 239°F). Install in temperatures as low as -20°C (-4°F).

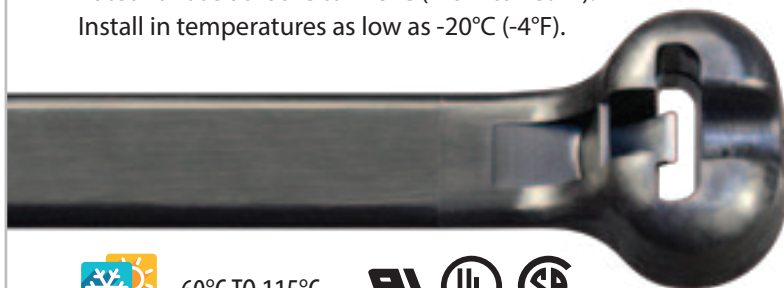

-60°C TO 115°C



Black Weather Resistant Nylon 6/6

Sold in packages of 100

Part Number	Length in. mm	Width in. mm	Thickness in. mm	Max Bundle Diameter in. mm	Min Loop Tensile Str. lbs. N
Miniature Cross Section					
PW523MX	4.0 102	.095 2.4	.036 .9	.90 23	18 80
PW5232MX	7.9 201	.095 2.4	.046 1.2	2.00 51	18 80
PW5234MX	14.2 361	.095 2.4	.046 1.2	4.00 102	18 80
Intermediate Cross Section					
PW524MX	6.1 155	.141 3.6	.041 1.0	1.50 38	40 178
PW5242MX	8.0 203	.141 3.6	.041 1.0	2.00 51	40 178
PW526MX	11.3 287	.141 3.6	.049 1.2	3.00 76	40 178
PW5244MX	14.3 363	.141 3.6	.049 1.2	4.00 102	40 178
Standard Cross Section					
PW525MX	8.0 203	.185 4.7	.045 1.1	2.00 51	50 222
PW5253MX	12.0 305	.185 4.7	.052 1.3	3.00 76	50 222
PW528MX	15.1 384	.185 4.7	.052 1.3	4.00 102	50 222
Light-Heavy Cross Section (straight tip)					
PW5272MX	8.7 221	.275 7.0	.065 1.7	2.00 51	120 534
PW527MX	14.9 378	.275 7.0	.065 1.7	4.00 102	120 534
PW5275MX	18.1 460	.275 7.0	.065 1.7	5.00 127	120 534
PW5277MX	24.4 620	.275 7.0	.065 1.7	7.00 178	120 534
PW529MX	30.7 780	.275 7.0	.065 1.7	9.00 229	120 534



Straight Tip

Curved Tip




Screw Mount Ties
also available



**Cable Ties
Service Kit**
available on
page 71

Features



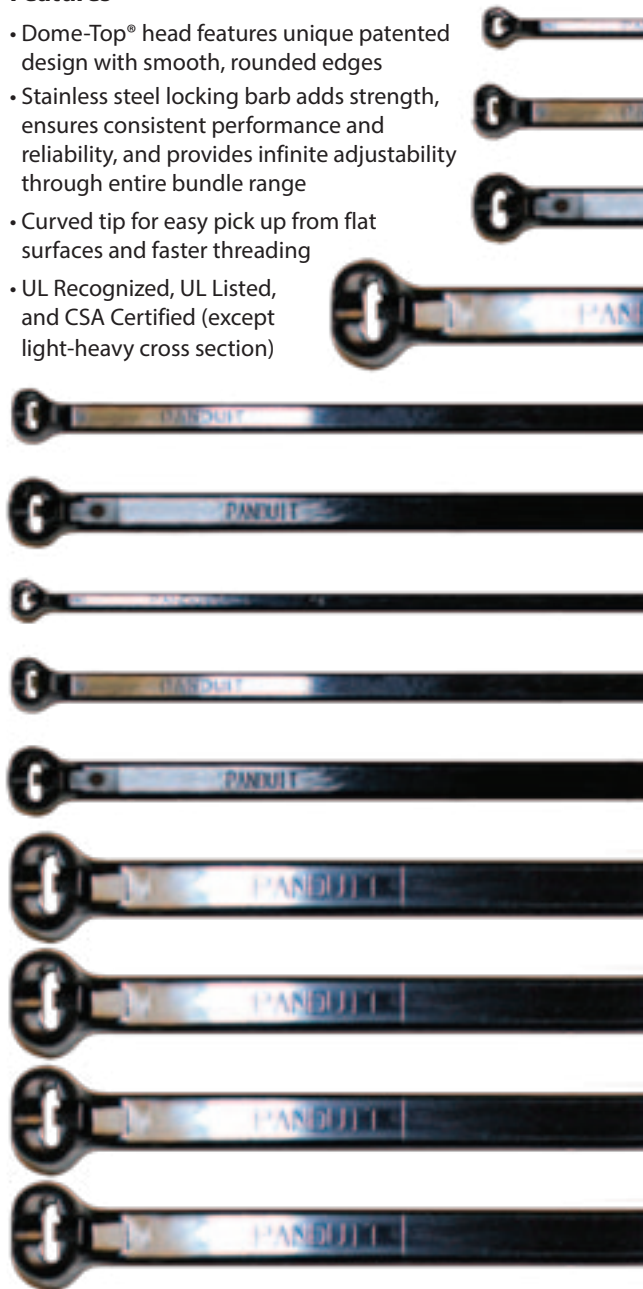












- Dome-Top® head features unique patented design with smooth, rounded edges
- Stainless steel locking barb adds strength, ensures consistent performance and reliability, and provides infinite adjustability through entire bundle range
- Curved tip for easy pick up from flat surfaces and faster threading
- UL Recognized, UL Listed, and CSA Certified (except light-heavy cross section)



Bulk quantities available



Black Weather Resistant Nylon – Indoor/Outdoor Use

	Part Number	Length	Cross Section Type
	PW523MX	4.0"	Miniature
	PW524MX	6.1"	Intermediate
	PW5232MX	7.9"	Miniature
	PW5242MX	8.0"	Intermediate
	PW525MX	8.0"	Standard
	PW5272MX	8.7"	Light Heavy
	PW526MX	11.3"	Intermediate
	PW5253MX	12.0"	Standard
	PW5234MX	14.2"	Miniature
	PW5244MX	14.3"	Intermediate
	PW528MX	15.1"	Standard
	PW527MX	14.9"	Light Heavy
	PW5275MX	18.1"	Light Heavy
	PW5277MX	24.4"	Light Heavy
	PW529MX	30.7"	Light Heavy

Stainless Steel Ties available by special order

Ties shown approximately actual size, except length as indicated

WIRE MANAGEMENT