

Electrical and Sealing Tape

Pro Grade PVC Electrical Tape

StrongHold™ Professional Grade Electrical Tape is a 7 mil non-corrosive, pressure sensitive vinyl electrical tape that provides high abrasion resistance with easy application over a range of temperatures. Flame retardant and cold resistant, with excellent elasticity and insulating properties. High-elongation. Protects against abrasion, water, oil, and other corrosive chemicals. Suitable as primary insulation when splicing up to 600 Volts. Can be used as protective jacketing.

StrongHold™ Pro Grade Tape is offered in black (ST-43) and in nine colors for color coding (ST35). Packaged individually in clear plastic storage pucks.

- 7 mil thickness
- -18°C to 105°C (0°F to 221°F)
- 260% elongation typ
- 30 N/cm breaking strength typ
- 2.2 N/cm sticking power typ, adhesion to steel at 22°C (72°F)



StrongHold ST43

3/4" x 66' x .007"
19mm x 20m x .177mm

Part Number Color
ST43 ● Black

StrongHold ST35

3/4" x 66' x .007"
19mm x 20m x .177mm

Part Number	Color
ST35-WHITE	○ White
ST35-GREEN	● Green
ST35-GRAY	● Gray
ST35-RED	● Red
ST35-VIOLET	● Violet
ST35-BLUE	● Blue
ST35-ORANGE	● Orange
ST35-BROWN	● Brown
ST35-YELLOW	● Yellow



General Purpose PVC Electrical Tape

StrongHold™ General Purpose PVC Electrical Tape is an economical 7 mil, high-elongation vinyl tape with a non-corrosive, pressure sensitive rubber adhesive. Excellent conformability properties. Abrasion and weather-resistant. Excellent mechanical and electrical insulation properties. Wraps smoothly and holds tight over a wide temperature range. Suitable as primary insulation when splicing up to 600 Volts or 80°C (176°F).

StrongHold™ General Purpose comes in black (ST14) and in nine colors for color coding (ST17). Individual cellophane wrapped rolls.

- 7 mil thickness
- -10°C to 80°C (14°F to 176°F)
- 200% elongation typ
- 25 N/cm breaking strength typ
- 1.6-1.8 N/cm sticking power typ, adhesion to steel at 22°C (72°F)



StrongHold ST14

3/4" x 60' x .007"
19mm x 18m x .177mm

Part Number Color
ST14 ● Black

StrongHold ST17

3/4" x 66' x .007"
19mm x 20m x .177mm

Part Number	Color
ST17-WHITE	○ White
ST17-GREEN	● Green
ST17-GRAY	● Gray
ST17-RED	● Red
ST17-VIOLET	● Violet
ST17-BLUE	● Blue
ST17-ORANGE	● Orange
ST17-BROWN	● Brown
ST17-YELLOW	● Yellow



Heavy Duty PVC Electrical Tape

StrongHold™ Heavy Duty PVC Electrical Tape

is an all-weather, pressure sensitive vinyl electrical tape that applies easily and provides a high level of performance over a range of temperatures.

ST88 Heavy Duty Tape protects against abrasion, water, oil, and other corrosive chemicals. The tape is UL 510 flame retardant, UV resistant, cold resistant, non-corrosive, and lead free.

ST88 is suitable as primary insulation when used for splicing up to 600 Volts or 80°C (176°F) and can be used as a protective outer jacket over splices in low temperature applications.

3/4" and 2" widths.
Individual cellophane wrapped rolls.

- 8.5 mil thickness
- -18°C to 105°C (0°F to 221°F)
- 300% elongation typ
- 30 N/cm breaking strength typ
- 2.2 N/cm sticking power typ, adhesion to steel at 22°C (72° F)



StrongHold ST88

3/4" x 66' x .0085"
19mm x 20m x .21mm

Part Number	Color
ST88	● Black

2" x 66' x .0085"
50.8mm x 20.1m x .021mm

Part Number	Color
ST88-2	● Black




-18°C TO 105°C



STRONGHOLD
CONTRACTOR PRODUCTS

Self-Fusing Silicone Tape

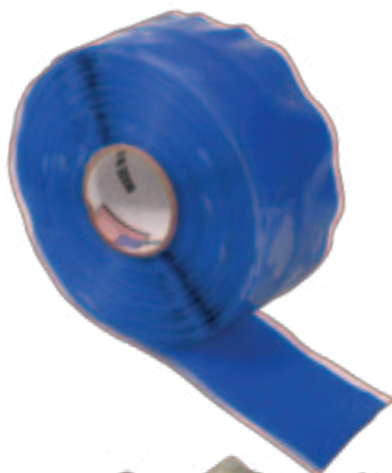

Wrap 'N Seal Self-Fusing Silicone Tape self fuses and completely cures within 24 hours to form a permanent, moisture-tight, salt-resistant seal. Ideal for high temperature and marine use.

- No adhesive—applies cleanly with no sticky residue
- Seamless, self fusing and begins curing immediately
- Center ridge wrapping guide for uniform application
- Excellent insulator with high dielectric strength
- -53°C to 260°C+ (-65°F to 500°F+) operating temp
- 700 PSI tensile strength
- 300% Elongation



-53°C TO OVER 260°C

Wrap 'N Seal Tape

1" x 20'
25.4mm x 6.1m

Part Number	Color
SW-BLK	● Black
SW-WHT	○ White
SW-GRN	● Green
SW-GRY	● Gray
SW-RED	● Red
SW-BLU	● Blue
SW-ORG	● Orange
SW-CLR	● Clear
SW-YEL	● Yellow
SW-GLO	○ Glow in the Dark

