


Nylon Insulated Terminals

With tin plated brass support sleeve

SOLDERLESS CRIMP CONNECTORS

Made from pure electrolytic copper, **Nylon Insulated Terminals** are typically thicker and stronger than competitive heavy-duty terminals.

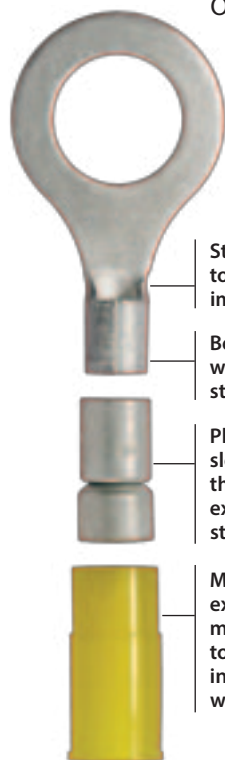

Open end design for fast inspection.

Annealed and tin plated for best conductivity and protection from corrosion.

Sturdy gussets reinforce tongue, deep V-notches improve wire grip

Beveled chamfer eases wire entry, eliminates strand turnback

Plated brass support sleeve extends beyond the inner barrel for extra strength and strain relief

Molded nylon sleeve extends beyond the metal support sleeve to ensure complete insulation between wire and terminal

Standards

- Exceeds MIL-T-7928 corrosion standards (Method 101 of MIL-STD-202 for 100 hours)
- Withstands and exceeds required millivolt-drop readings after vibration testing per MIL-T-7928
- Exceeds tensile performance specifications compared to UL and Military standards and maximum wire strength data (ASTM designation B-58)

Sold in packages of 100

25 piece bubble packs and bulk quantities also available

22 – 18 AWG

Part Number Stud Size

NR-18-4 #2 – #4

NR-18-6 #4 – #6

NR-18-8 #6 – #8

NR-18-10 #8 – #10

NR-18-14 1/4"

NR-18-56 5/16"

NR-18-38 3/8"

NSS-18-6 #4 – #6

NSS-18-8 #6 – #8

NSS-18-10 #8 – #10

NB-18 Standard

NB-18-4 Long

NBW-18 Window

16 – 14 AWG

Part Number Stud Size

NR-14-4 #2 – #4

NR-14-6 #4 – #6

NR-14-8 #6 – #8

NR-14-10 #8 – #10

NR-14-14 1/4"

NR-14-38 3/8"

NSS-14-6 #4 – #6

NSS-14-8 #6 – #8

NSS-14-10 #8 – #10

NB-14 Standard

NB-14-4 Long

NBW-14 Window

12 – 10 AWG

Part Number Stud Size

NR-10-6 #4 – #6

NR-10-6-2 #4 – #6

NR-10-8 #6 – #8

NR-10-8-2 #6 – #8

NR-10-10 #8 – #10

NR-10-14 1/4"

NR-10-56-2 5/16"

NR-10-38 3/8"

NSS-10-6 #4 – #6

NSS-10-8 #6 – #8

NSS-10-10 #8 – #10

NB-10 Standard

NB-10-4 Long







NBW-10 Window









Nylon Insulated Terminal Service Kits available on page 66

Nylon Insulated Quick Disconnects, Flags, Snap Plugs

Female 22 – 18 AWG




Part Number	Tab Size
 NQSF-18-110	.110" x .020"
 NQSF-18-187	.187" x .020"
 NQSF-18-250	.250" x .032"
 NQSF-FI-18-110	.110" x .020"
 NQSF-FI-18-187	.187" x .020"
 NQSF-FI-18-250	.250" x .032"

Female 16 – 14 AWG


Part Number	Tab Size
 NQSF-14-110	.110" x .020"
 NQSF-14-187	.187" x .020"
 NQSF-14-250	.250" x .032"
 NQSF-FI-14-110	.110" x .020"
 NQSF-FI-14-187	.187" x .020"
 NQSF-FI-14-250	.250" x .032"

Our complete line of Male, Female, and Piggy-Back **Quick Disconnects, Flag Disconnects, and Snap Plugs** are fully insulated and precision engineered. The female terminal precisely fits into the corresponding male housing, resulting in a fully insulated in-line splice that may be connected and disconnected without damage.


Female 12 – 10 AWG

Part Number	Tab Size
 NQSF-10-250	.250" x .032"
 NQSF-10-375	.375" x .032"
 NQSF-FI-10-250	.250" x .032"





Male 12 – 10 AWG

Part Number	Tab Size
 NQSM-10-250	.250" x .032"





Piggyback 12 – 10 AWG

Part Number	Tab Size
 NST-FI-10-250	.250" x .032"









Male 22 – 18 AWG

Part Number	Tab Size
 NQSM-18-187	.187" x .020"
 NQSM-18-250	.250" x .032"
 NQSM-FI-18-187	.187" x .020"
 NQSM-FI-18-250	.250" x .032"



Male 16 – 14 AWG

Part Number	Tab Size
 NQSM-14-187	.187" x .020"
 NQSM-14-250	.250" x .032"
 NQSM-FI-14-187	.187" x .020"
 NQSM-FI-14-250	.250" x .032"



Snap Plugs and Receptacles

Part Number	Diameter	Wire Range	Part Number	Diameter	Wire Range
 NM-18-157	.157"	22 – 18	 NM-14-157	.157"	16 – 14
 NM-18-176	.176"	22 – 18	 NM-14-176	.176"	16 – 14
Part Number	Diameter	Wire Range	Part Number	Diameter	Wire Range
 NF-18-157	.157"	22 – 18	 NF-14-157	.157"	16 – 14
 NF-18-176	.176"	22 – 18	 NF-14-176	.176"	16 – 14




Piggyback 22 – 18 AWG

Part Number	Tab Size
 NST-18-250	.250" x .032"
 NST-FI-18-250	.250" x .032"

Piggyback 16 – 14 AWG

Part Number	Tab Size
 NST-14-250	.250" x .032"
 NST-FI-14-250	.250" x .032"

Flag Disconnects

Part Number	Flag-18-N	Flag-14-N	Flag-10-N
			
Tab Size	.250" x .032"	.250" x .032"	.250" x .032"
Wire Range	22 – 18	16 – 14	12 – 10

Parts shown
approximately
actual size