


Plated Copper Ferrules Weather Pack Locking Connectors

Tin Plated Copper Ferrules

Ferrules stabilize stripped conductor ends, allowing wires to be repeatedly connected and disconnected without damage to the individual stranding. Insulated ferrules are color coded for wire and size identification.

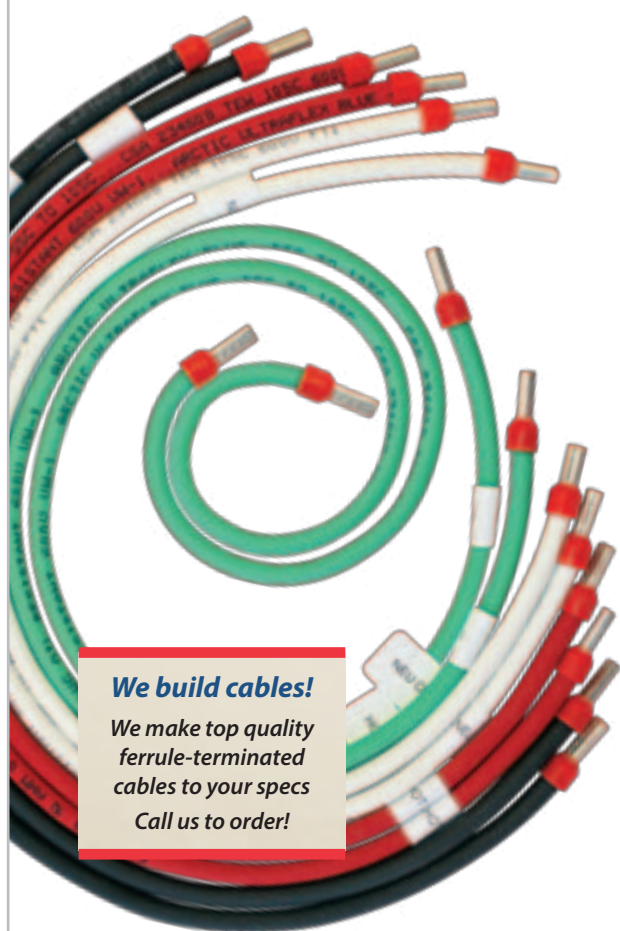

We build cables!

We make top quality
ferrule-terminated
cables to your specs

Call us to order!



Ferrule Crimp Tools



Insulated Wire Ferrules

Sold in bags of 100



Part Number	AWG	mm2	Color	d1	d2	L1	L2
FER-20INS	20	0.75	white	1.2	2.8	14	8
FER-18INS	18	1.0	red	1.4	3.0	14	8
FER-16INS	16	1.5	black	1.7	3.5	14	8
FER-14INS	14	2.5	blue	2.2	4.2	15	8
FER-12INS	12	4.0	gray	2.8	4.8	18	10
FER-10INS	10	6.0	yellow	3.5	6.3	20	12
FER-8INS	8	10.0	red	4.5	7.6	22	12
FER-6INS	6	16.0	blue	5.8	8.8	22	12
FER-2INS	2	35.0	beige	8.3	12.4	30	16



Uninsulated Wire Ferrules

Sold individually


Part Number	AWG	mm2	d1	d2	L1
FER-8	8	10.0	4.5	5.8	12
FER-6	6	16.0	5.8	7.5	12
FER-4	4	25.0	7.3	9.5	15
FER-2	2	35.0	8.3	11.0	18
FER-1/0	1/0	50.0	10.3	13.0	32
FER-2/0	2/0	70.0	12.5	15.0	32
FER-3/0	3/0	95.0	14.5	17.0	32
FER-4/0	4/0	120.0	17.2	19.0	32
FER-250	250 MCM	150.0	19.5	21.0	32
FER-500	500 MCM	240.0	23.0	25.0	40



Twin Wire Ferrules

Sold in bags of 100

Part Number	AWG	mm2	Color	d1	A/B	L1	L2
FER-22TWIN	2x22	0.5	white	1.4	5.0/3.0	15	8
FER-20TWIN	2x20	0.75	gray	1.7	5.5/3.0	15	8
FER-18TWIN	2x18	1.0	red	2.0	5.8/3.2	15	8
FER-16TWIN	2x16	1.5	black	2.2	6.5-3.6	16	8
FER-14TWIN	2x14	2.5	blue	2.8	8.0/4.5	19	10
FER-12TWIN	2x12	4.0	gray	3.5	9.0/5.2	22	12
FER-10TWIN	2x10	6.0	yellow	4.5	11.4/6.2	23	12
FER-6TWIN	2x6	16.0	blue	8.3	17.2/9.5	29	16

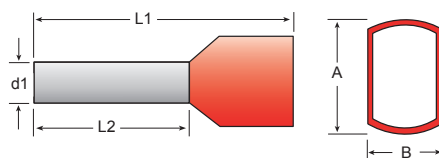

Call for more ferrule sizes and styles

**Ferrules Service Kits
available — page 68**